

正样
2025.02.08
B01

copyright:copyright infingmengt reserved


| Amendment | Description |
|---|---|
| | |


外部公开

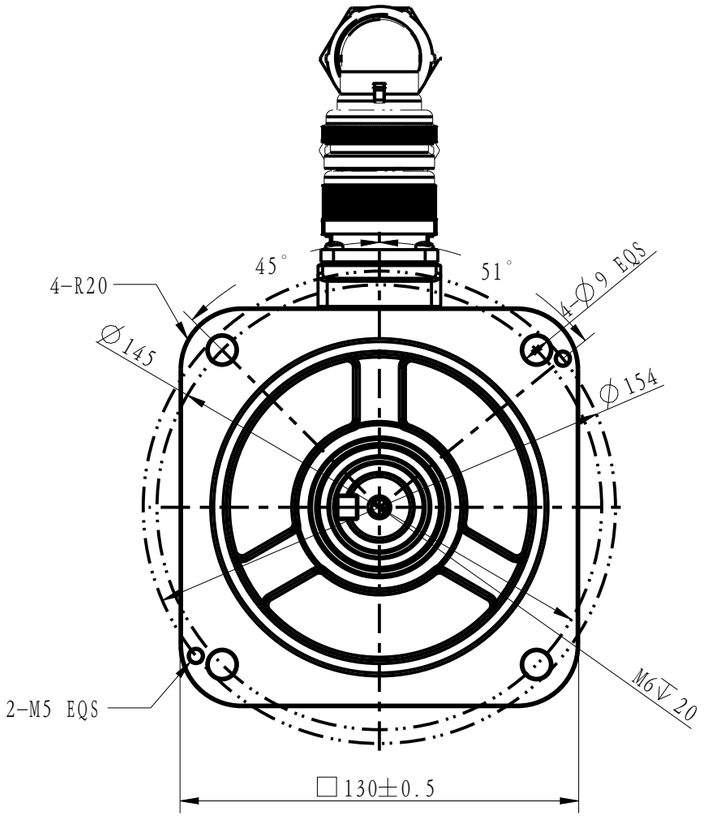

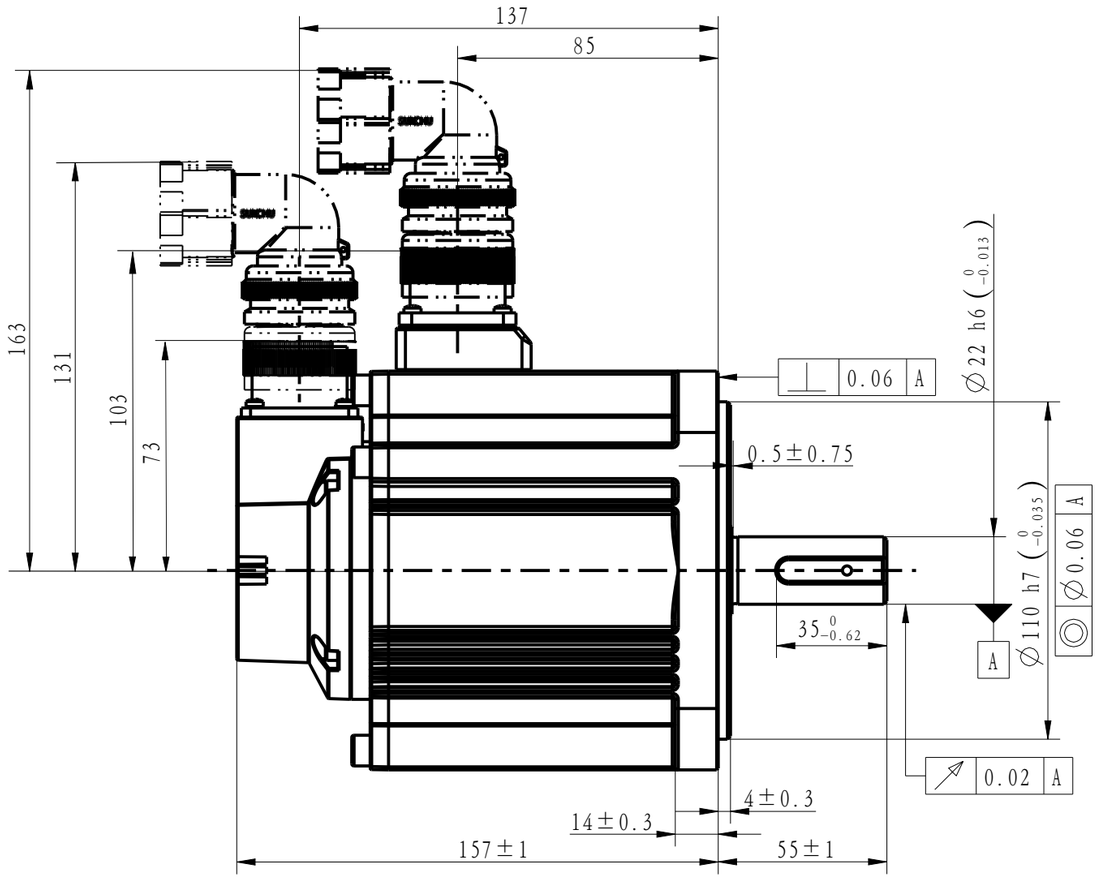


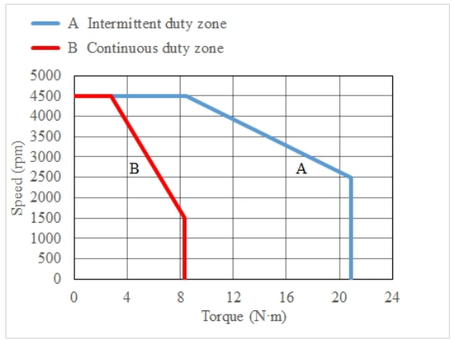

| Basic function parameters | |
|---|---|
| Rated power kW | 1.3 |
| Rated voltage V | 220 |
| Rated current A | 10.5 |
| Peak current at rated speed A | 27.3 |
| Rated torque Nm | 8.34 |
| Peak torque at rated speed Nm | 20.85 |
| Rated speed rpm | 1500 |
| Max speed rpm | 4500 |
| Rotor inertia kg.cm$^2$ | 19.25±10% |
| Encoder resolution | 26bit |
| Insulation class | F |
| Protection level | IP67 |
| Static torque of brake Nm | / |
| Brake power supply V | / |
| Brake backlash° | / |
| Duty cycle | S1 |
| Radial line load N | ≤686 |
| Axial load N | ≤196 |





Dimension of shaft end




Dimension of shaft end with key



| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | Motor Outline Drawing | 01117964-WX | |
| B01 | Replace | / | 20241227 | | | |
| Version | Change method | Changed by | Date | | | |
| Design | / | | | / | Mark | INOVANCE |
| Check | / | | | | | |
| Craft | / | | | | | |
| Verify | / | | | Weight | Scale | Version |
| Stangardization | / | | | 7.1kg | 1:2 | B01 |
| Approve | / | | | | | |

| Page 1 of 1 | |
|---|---|
| Model | MS1H3-13C15CB-A631R-INT |

INOVANCE

A3