
正样
2026.03.30
B00


Amendment	Description


外部公开

Copyright: Copyright infringement reserved.


Unit: mm

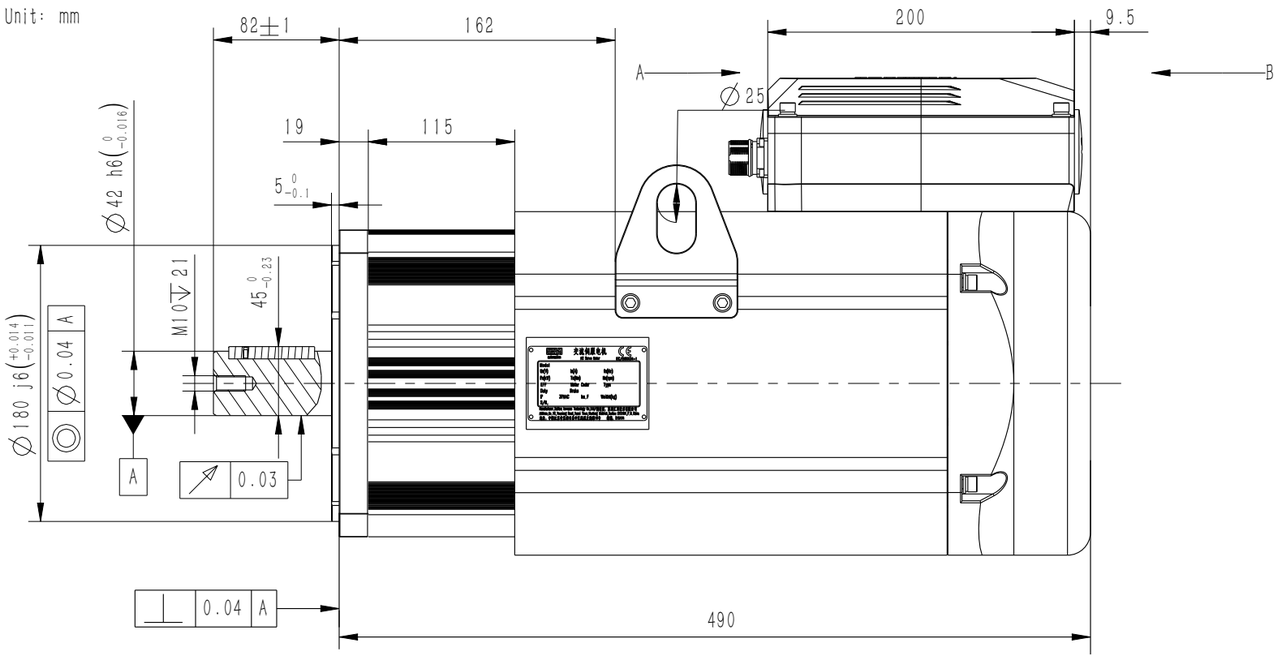


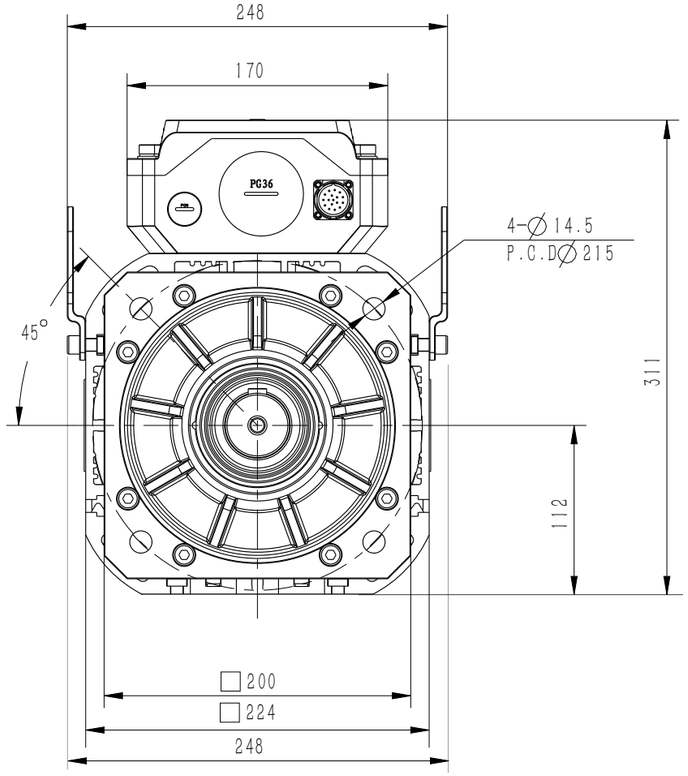




Standard accessories: A-type round head ordinary flat key
12x8x56 Refer to GB/T 1096

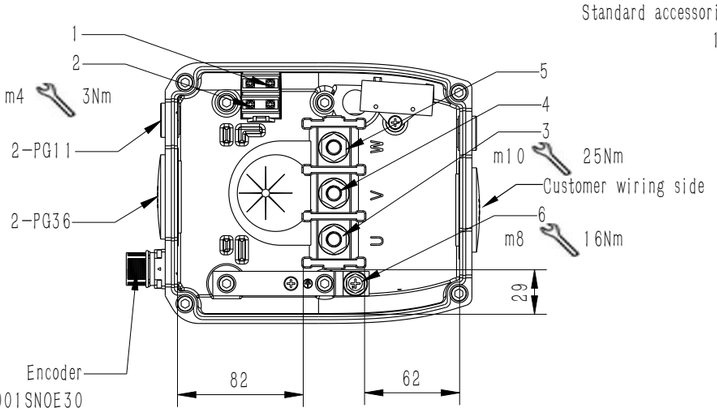

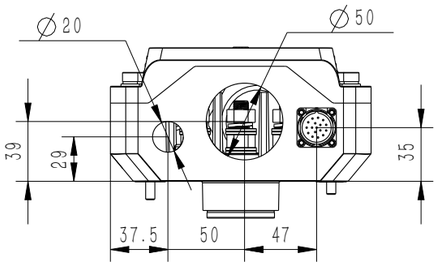


View A

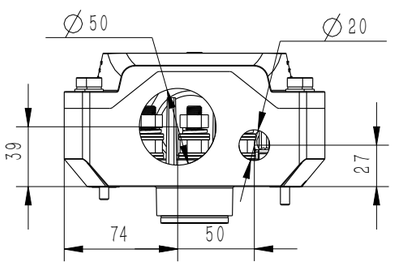


View B

Service life	
Radial load (N)	Axial load (N)
Fr	Fa
1332	486



Nr	Specifications	Shape	Description
1	M4	Forked Type	Fan+
2	M4		Fan-
3	M10	Ring Type	U(red)
4	M10		V(yellow)
5	M10		W(blue)
6	M8		GND

Name	Definition of wiring for absolute value encoders							PT1000		
Definition	PS+ Yellow	PS- Yellow black	VB Battery+ Blue	VB Battery- Blue black	+5V Red	GND Black	Shielding layer	PT1000- White	PT1000+ Red	
17P Aviation connector	10	7	5	6	16	9	15	4	14	



				Motor Outline Drawing	0111AT04-WX	
B00	New Archive	龚寅	20260330			
Version	Change method	Changed by	Date			
Design	龚寅			/	Mark	INOVANCE
Check	何亮					
Craft	孟沙					
Verify	姚铜佳			Weight	Scale	Version
Standardization	朱秋萍			65kg	1:4	B00
Approve	王凡					
					Page 1 Of 2	
					Model	MEG20-33D22CD-A3A1F-CEN


INOVANCE

A3

Copyright: Copyright infringement reserved.

Amendment	Description

Basic function parameters		
Type	Unit	Value
Rated Torque	Nm	142
Rated Current	A	57.3
Peak Current	A	112.5
Rated Power	kW	32.7
Rated Speed	rpm	2200
Rate Frequency	Hz	146.67
Peak Torque	Nm	310
Max speed@380V	rpm	3000
Rated voltage	V	380
Rotor inertia	$kg \cdot cm^2$	194
Weight	kg	62
Stall Torque	**Nm**	168.9
Stall current	A	68
Duty	S1	

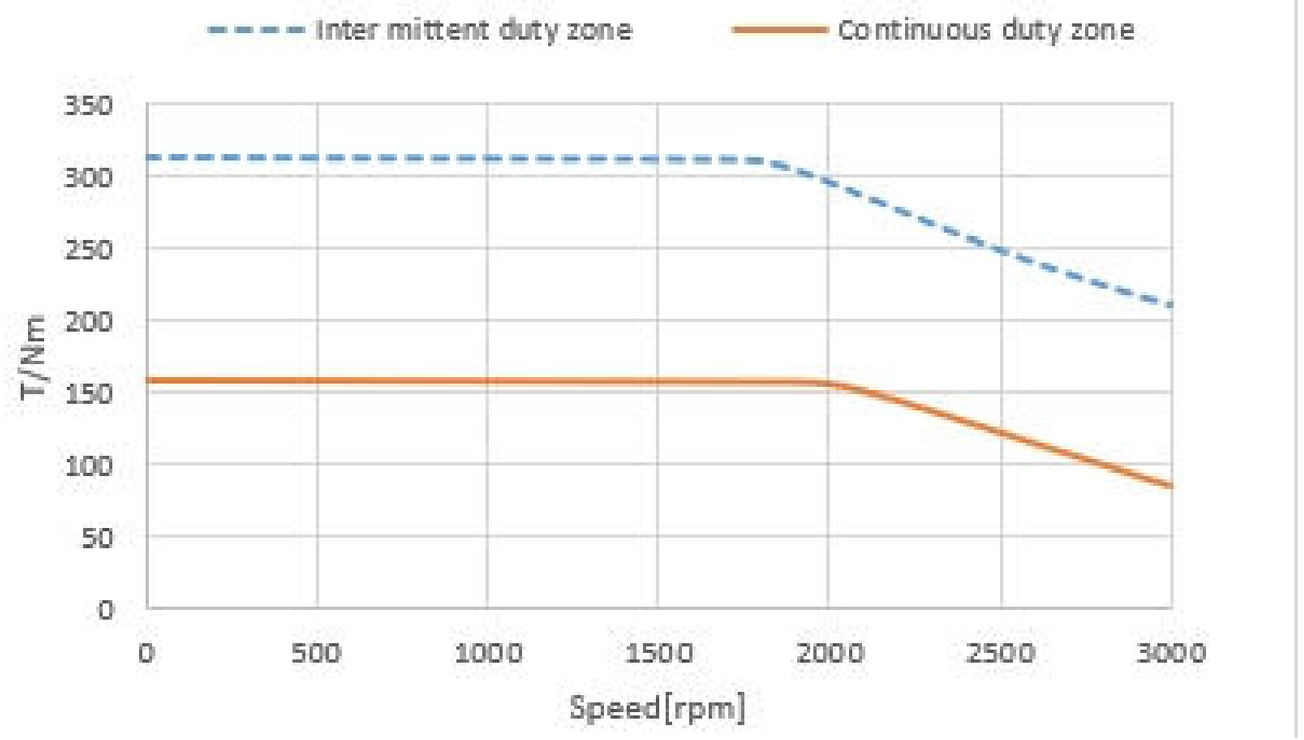

				Motor Outline Drawing	0111AT04-WX	
B00	New Archive	龚寅	20241226			
Version	Change method	Changed by	Date			
Design	龚寅			/	Mark	INOVANCE
Check	何亮					
Craft	孟沙					
Verify	姚铜佳			Weight	Scale	Version
Standardization	朱秋萍			65kg	1:4	B00
Approve	王凡					

Page 1 Of 2

Model: MEG20-33D22CD-A3A1F-CEN

INOVANCE

A3