

B00
2026.05.13
正样


外部公开

Amendment	Description


Unit: mm

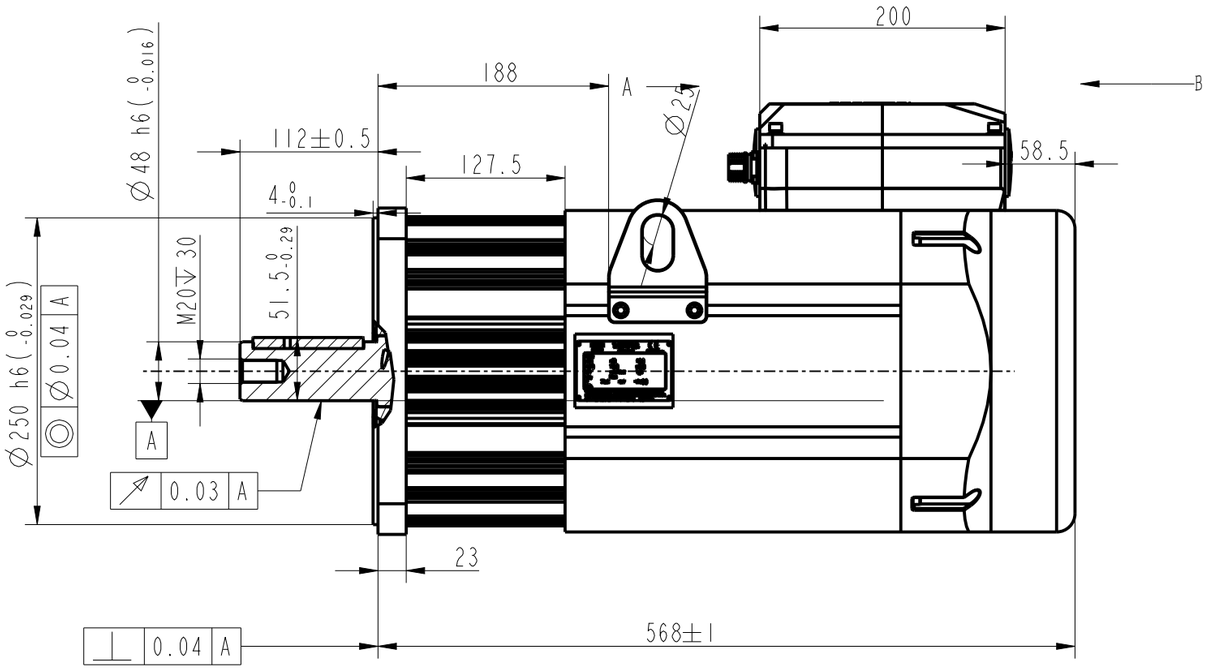

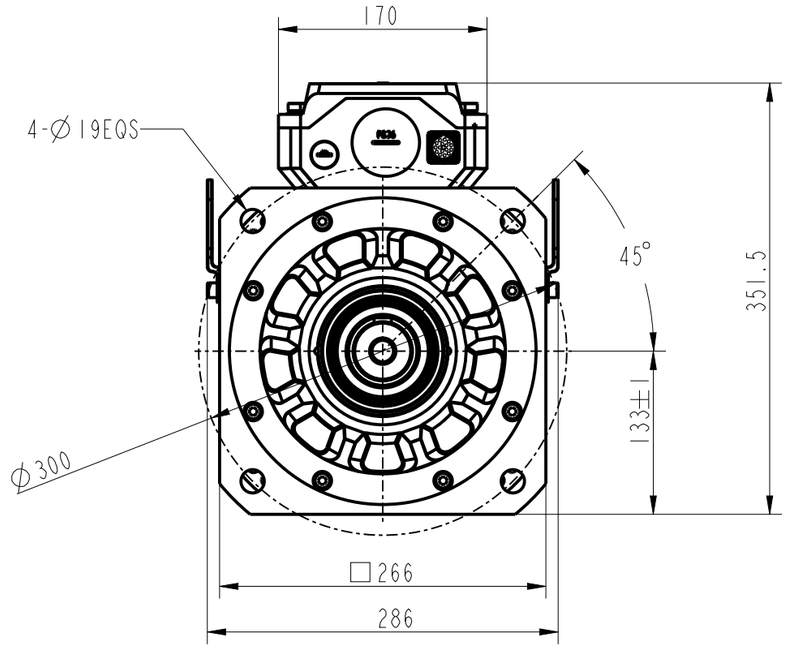





Standard accessories: A-type round head ordinary flat key
14x9x90 Refer to GB/T 1096

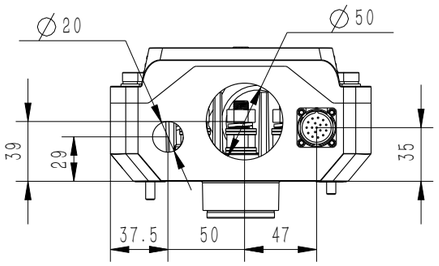


View A

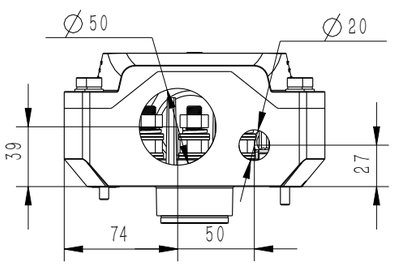

View B

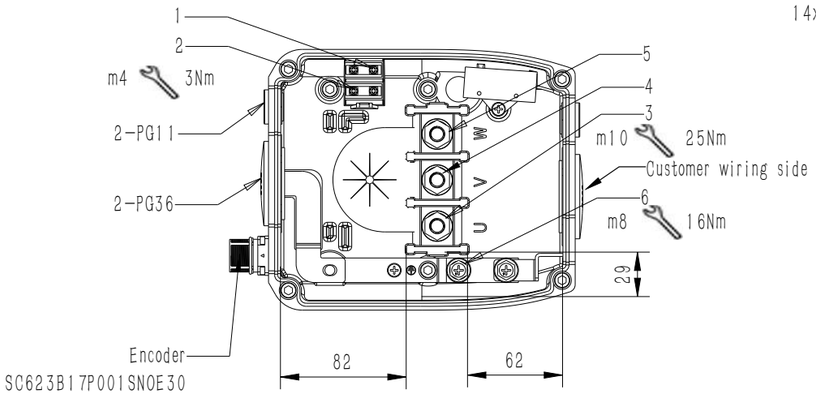

Service life	
Radial load (N)	Axial load (N)
Fr	Fa
2843	540



Nr	Specifications	Shape	Description
1	M4	Forked Type	Fan+
2	M4		Fan-
3	M10	Ring Type	U(red)
4	M10		V(yellow)
5	M10		W(blue)
6	M8		GND

Name	Definition of wiring for absolute value encoders							PT1000		
Definition	PS+ Yellow	PS- Yellow black	VB Battery+ Blue	VB Battery- Blue black	+5V Red	GND Black	Shielding layer	PT1000- White	PT1000+ Red	
17P Aviation connector	10	7	5	6	16	9	15	4	14	

				Motor Outline Drawing		0111B509-WX	
B00	New Archive	/	20260513				
Version	Change method	Changed by	Date				
Design	/			/	Mark	INOVANCE	
Check	/						
Craft	/						
Verify	/			Weight	Scale	Version	Page 1 Of 2
Standardization	/			91.8kg	1:2	B00	Model MEG23-51D22CD-A3A1F-CEN
Approve	/						

Copyright: Copyright infringement reserved.

INOVANCE

A3


B00
2026.05.13
正样

Amendment	Description

外部公开

Copyright: Copyright infringement reserved.

Basic function parameters		
Type	Unit	Value
Rated Torque	Nm	220
Rated Current	A	88
Peak Current	A	135
Rated Power	kW	50.7
Rated Speed	rpm	2200
Rate Frequency	Hz	146.67
Peak Torque	Nm	352
Max speed@380V	rpm	3000
Rated voltage	V	380
Rotor inertia	$kg \cdot cm^2$	375
Weight	kg	91.8
Stall Torque	Nm	264
Stall current	A	105.6
Duty	S1	

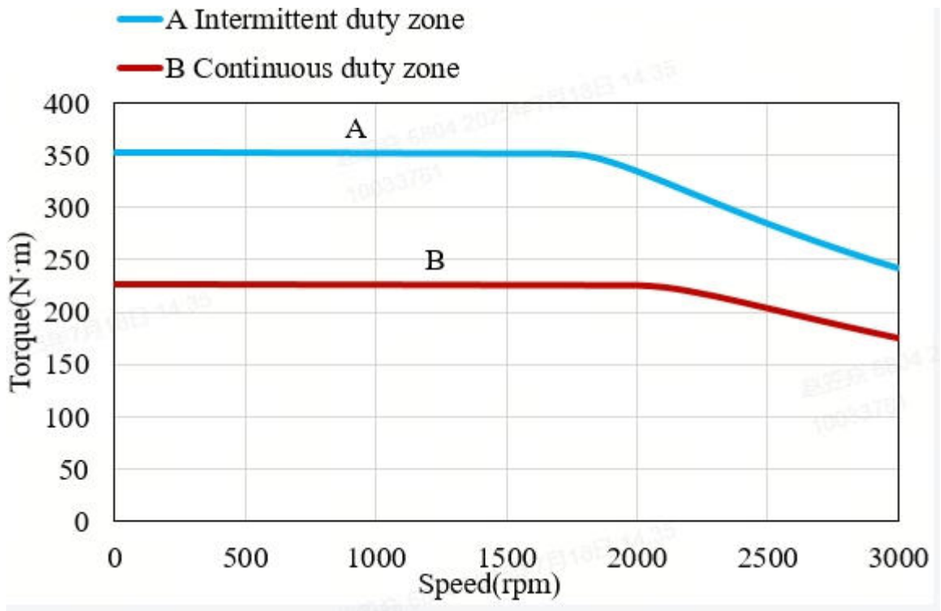

				Motor Outline Drawing	0111B509-WX	
B00	New Archive	/	20260513			
Version	Change method	Changed by	Date			
Design	/			/	Mark	INOVANCE
Check	/					
Craft	/					
Verify	/			Weight	Scale	Version
Standardization	/			91.8kg	1:2	B00
Approve	/					

Page 2 Of 2

Model: MEG23-51D22CD-A3A1F-CEN

INOVANCE

A3