

正样
2026.07.15
B00


Amendment	Description

外部公开


版权所有，侵权必究

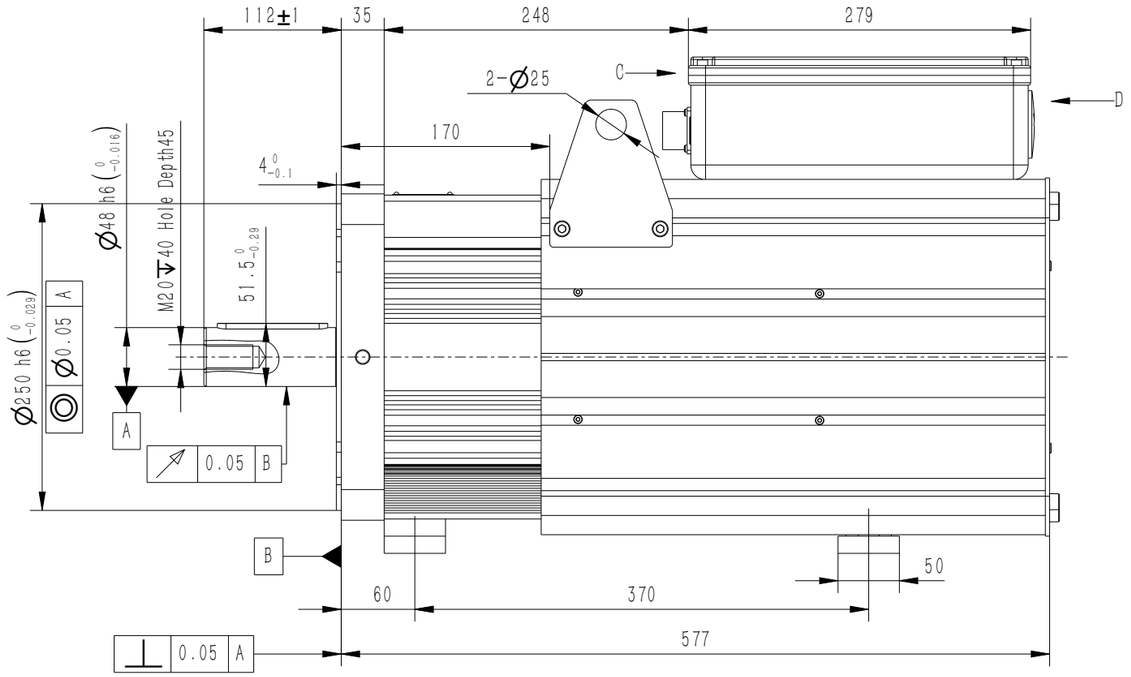


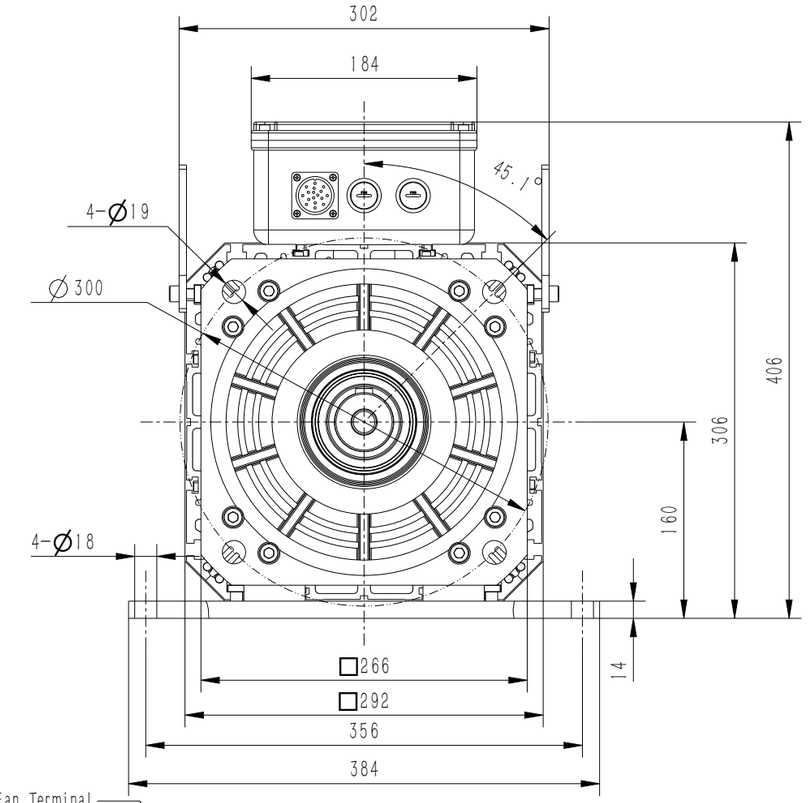


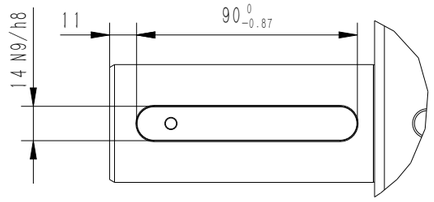

Standard Accessories: Type A Round Head Plain Flat Key 14× 9× 90
Refer to GB/T 1096

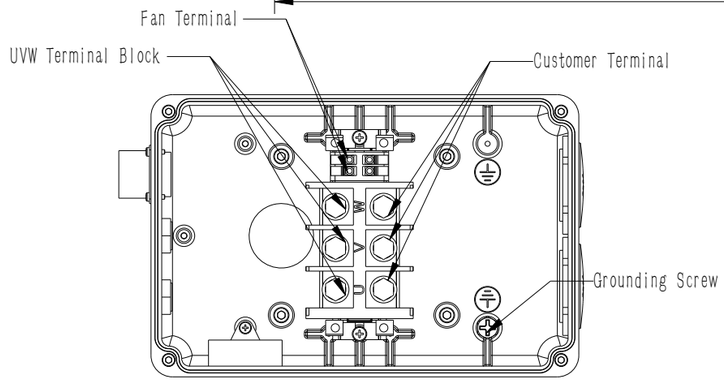

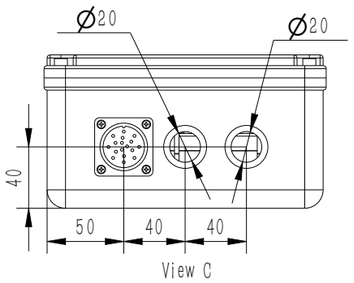

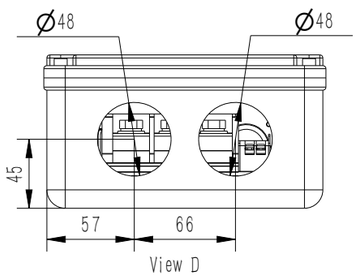

Name	Resolving transformer						Earth wire	PTC		KTY		
Definition	REF+ Red white	REF− Yellow white	COS+ Red	COS− Black	SIN+ Yellow	SIN− Blue	Shielding	PTC+ Blue	PTC− Blue	KTY+ White	KTY− Green	
17PAviation connecto	A	B	C	D	E	F	J	G	H	K	L	


				Motor Outline Drawing	0111CJ78-WX
B00	新归档	何亮	20260716		
Version	Change method	Change by	Date		
Design	何亮			/	Mark
Check	姚钢佳				INOVANCE
Craft	孟沙				
Verify	王凡			Weight	Scale / Version / Page 1 of 2
Standardization	朱秋萍			141.3kg	1:2 / B00 / Page 1 of 2
Approve	庞一龙				Model: ISMG2-42D15CD-RIA1FA-INT

苏州汇川技术有限公司

Amendment	Description

版权所有，侵权必究

Basic function parameters		
Duty	S4-25%	
Type	Unit	Value
Rated Power	kW	42.4
Rated Voltage	V	380
Rated Speed	rpm	1500
Rated Frequency	Hz	100.00
Rated Current	A	87.7
Rated Torque	Nm	270
Peak Current	A	166.5
Peak Torque	Nm	440
Max. Speed	rpm	1800
Efficiency	%	94.1
Rotor inertia	kg · cm2	368

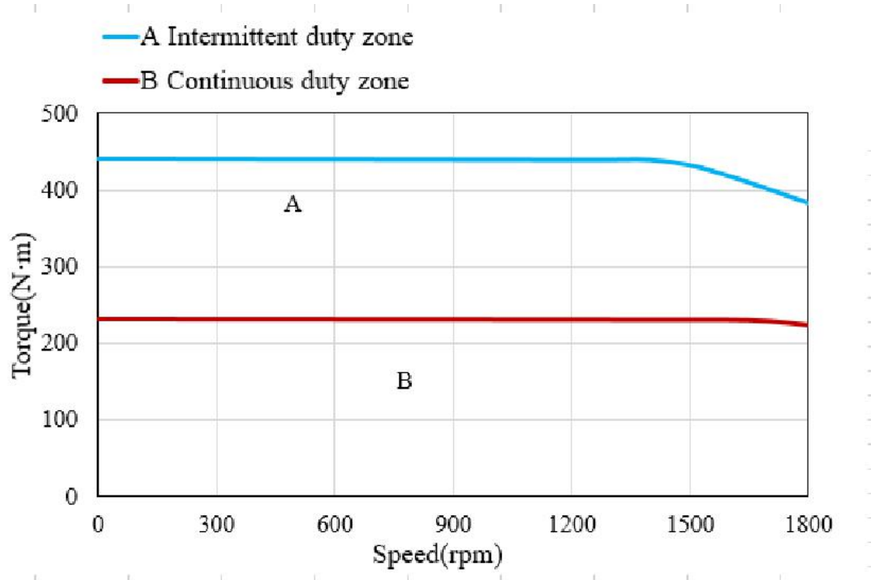

苏州汇川技术有限公司

				Motor Outline Drawing	0111CJ78-WX	
B00	新归档	何亮	20260716			
Version	Change method	Change by	Date			
Design	何亮			/	Mark	INOVANCE
Check	姚钢佳					
Craft	孟沙					
Verify	王凡			Weight	Scale	Version
Standardization	朱秋萍			/	1:2	B00
Approve	庞一龙					

Model: ISMG2-42D15CD-R1A1FA-INT

A3